




kit includes: stabilising foot, telescopic pole, top & bottom rails, rigidising strips, tool wrap and carry case




① Affix both rigidising strips to the top and bottom edges of the graphic

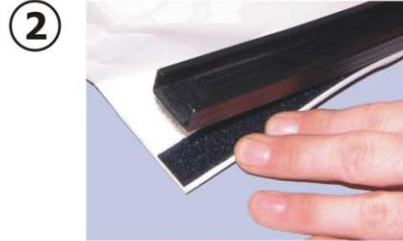

② Apply the top and bottom rails to the rigidising strips



③ Slide the stabilising foot into the bottom rail recess and secure into position by tightening the thumbwheel

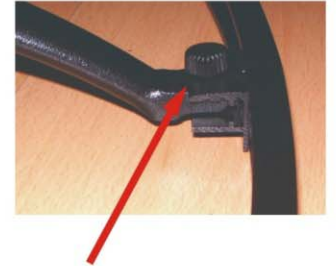

Thumbwheel



④ Insert the telescopic pole into the stabilising foot



⑤ Loosen the telescopic pole connections ready to extend the graphic



⑥ Carefully unroll the graphic and insert the top rail into the telescopic pole



⑦ Extend the telescopic pole to tension the graphic and lock into position

Technical Specification
Suitable for graphic thicknesses between 220 & 350 microns
Visible graphic area : 2200mm (H) x 800mm (W)
Unit weight : 3.5kg approx.

Take care when lowering the banner to prevent damage to the graphic