




# user instructions

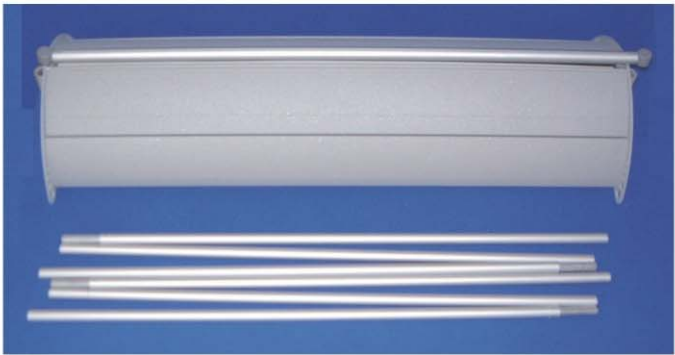

Kit includes : base, graphic cassette, two bungee poles and top rail

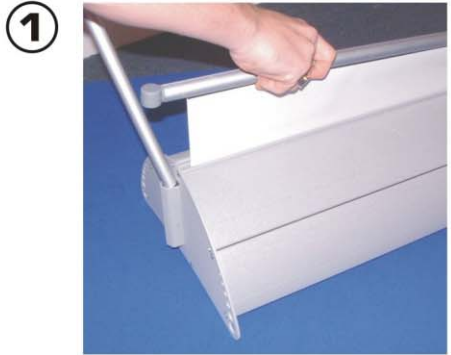

Assemble both bungee poles and insert into the base sides

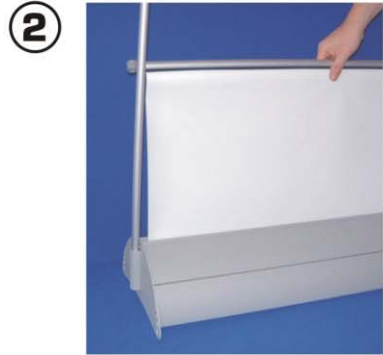

Lean the bannerstand backwards, extend the banner by lifting the top rail until the complete image is visible



Finally secure the banner into position by locating both top rail cups over each bungee pole

**Technical Specification**

Visible graphic area : 2070mm (H) x 600, 800, 1000 or 1200mm (W)  
(depending upon the version supplied)  
Note : The banner graphic requires an additional 200mm of material at the cassette end and 15mm additional material at the top rail end  
Unit weight : 8.5kg approx (800mm version)

**Guidelines for Graphic substrates**

- 1, Double sided graphics on a single substrate can be used
- 2, Material thickness must be between 225 and 300 microns in total
- 3, The substrate must be pliable and suitable for roller bannerstands
- 4, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently to the cassette and top rail

**Notes**

- 1, For fitting graphics to the top rail and cassette please refer to separate instruction sheet UI123
- 2, Take care when lowering the banner to prevent damage to the graphic (do not drop)